





PIAGGIO 1

PIAGGIO 1 PIAGGIO 1+ PIAGGIO 1 Active




All 6 colors are available for all models



- FRONT AND REAR LED LIGHTS
- LARGE UNDERSEAT COMPARTMET FOR A JET HELMET
- KEYLESS SYSTEM
- INNOVATIVE DESIGN WITH 3D TEXTURES

- ELECTRIC ENGINE
- DIGITAL COLOR DASHBOARD
- MOPED VERSION 45 AND 25 KM/H
- MOTORCYCLE 60 KM/H
- BRIGHT AND ORIGINAL COLORS

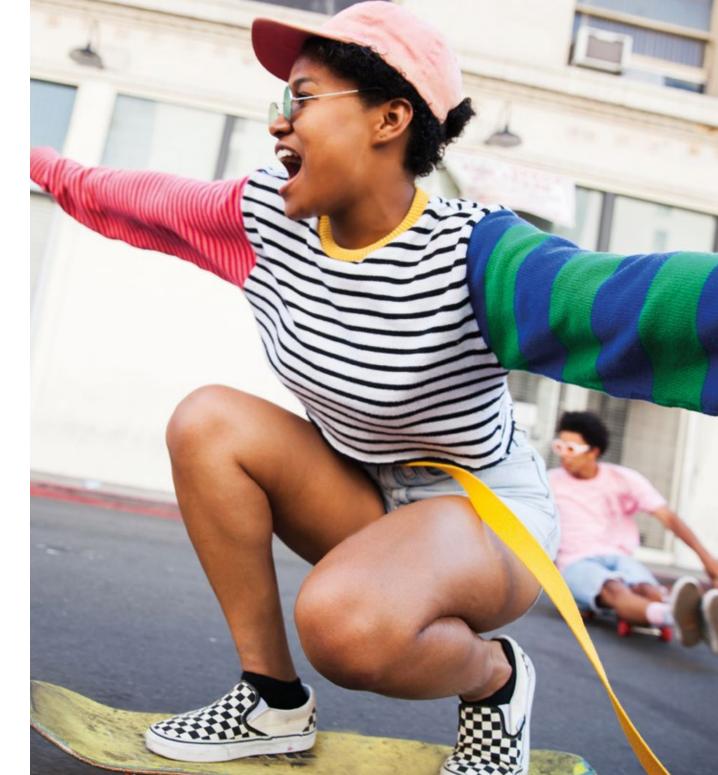



PIAGGIO 1 FENG CHEN WANG

PIAGGIO 1
PIAGGIO 1 Active



- FRONT AND REAR LED LIGHTS
- LARGE UNDERSEAT COMPARTMET FOR A JET HELMET
- KEYLESS SYSTEM
- INNOVATIVE DESIGN WITH 3D TEXTURES
- ELECTRIC ENGINE

- DIGITAL COLOR DASHBOARD
- MOPED VERSION 45 AND 25 KM/H
- MOTORCYCLE 60 KM/H
- EXCLUSIVE GRAPHICS
- PIAGGIO MIA



MP3 500 hpe SPORT ADVANCED



- HIGHER PERFORMANCE 500 HPE ENGINE
- ABS/ASR SYSTEM WITH COMBINED BRAKING
- RIDE-BY-WIRE ELECTRONIC THROTTLE AND DUAL STD/ECO MAP
- STORAGE COMPARTMENT WITH USB PORT
- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR 2 FULL-FACE HELMETS
- PARKING SYSTEM WITH NO STAND
- SADDLE OPENER REMOTE CONTROL WITH BIKE FINDER

- REVERSE GEAR
- HEADLIGHTS WITH LED DRL
- GAS REAR SHOCK ABSORBERS BY KAYABA
- RIDER'S FOOTREST WITH METAL INSERTS
- WAVY FRONT DISCS
- PIAGGIO MIA CONNECTIVITY SYSTEM
- PIAGGIO MP3 SPORT ADVANCED CAN BE RIDDEN WITH A STANDARD CAR DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW





- NEW HIGHER PERFORMANCE 400 HPE ENGINE
- ABS/ASR SYSTEM WITH COMBINED BRAKING
- STORAGE COMPARTMENT WITH USB PORT
- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR 2 FULL-FACE HELMETS
- HEADLIGHTS WITH LED DRL
- PARKING SYSTEM WITH NO STAND

- SADDLE OPENER REMOTE CONTROL WITH BIKE FINDER
- HIGH-QUALITY ARGENTO COMETA FINISHES
- PIAGGIO MIA CONNECTIVITY SYSTEM
- PIAGGIO MP3 CAN BE RIDDEN WITH A STANDARD CAR DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW



- NEW HIGHER PERFORMANCE 400 HPE ENGINE
- ABS/ASR SYSTEM WITH COMBINED BRAKING
- STORAGE COMPARTMENT WITH USB PORT
- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR 2 FULL-FACE HELMETS
- PARKING SYSTEM WITH NO STAND
- HEADLIGHTS WITH LED DRL

- SADDLE OPENER REMOTE CONTROL WITH BIKE FINDER
- CARBON LOOK FINISH
- WAVY FRONT DISCS
- RIDER'S FOOTREST WITH METAL INSERTS
- PIAGGIO MIA CONNECTIVITY SYSTEM
- PIAGGIO MP3 SPORT CAN BE RIDDEN
 WITH A STANDARD CAR DRIVER'S LICENCE
 WITHIN THE LIMITS OF THE LAW


MP3 300 hpe



- HIGHER PERFORMANCE 300 HPE ENGINE
- COMPLETE INSTRUMENTATION WITH MULTIFUNCTION DISPLAY
- ABS/ASR SYSTEM WITH COMBINED BRAKING
- DOUBLE HEADLIGHT WITH LED DRL
- COMFORTABLE SADDLE WITH LUMBAR SUPPORT

- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR TWO JET HELMETS
- LED FRONT AND REAR TURN INDICATORS
- STORAGE COMPARTMENT WITH USB PORT
- PIAGGIO MP3 300 HPE CAN BE RIDDEN WITH A STANDARD CAR DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW



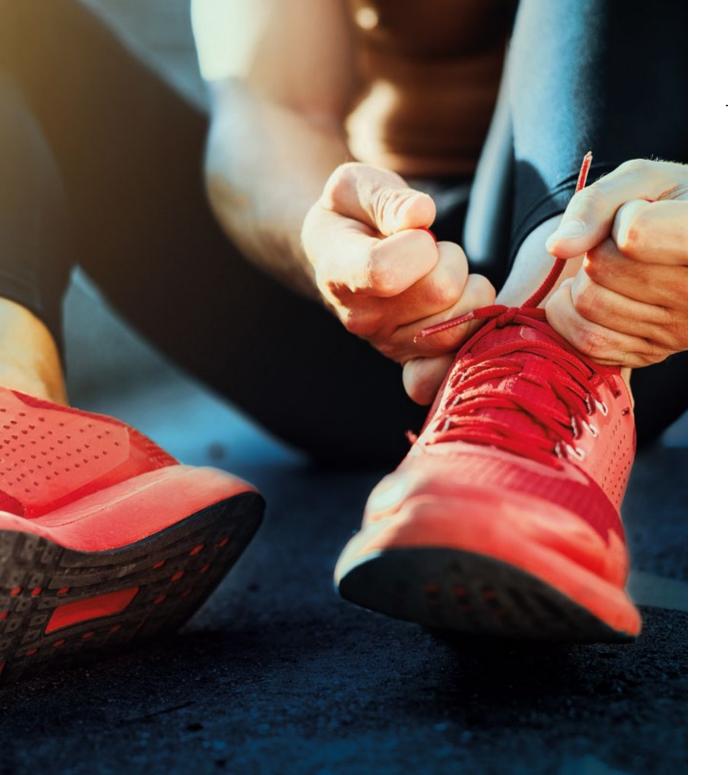



- HIGHER PERFORMANCE 300 HPE ENGINE
- COMPLETE INSTRUMENTATION WITH MULTIFUNCTION DISPLAY
- ABS/ASR SYSTEM WITH COMBINED BRAKING
- DOUBLE HEADLIGHT WITH LED DRL
- COMFORTABLE SADDLE WITH LUMBAR SUPPORT
- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR TWO JET HELMETS
- LED FRONT AND REAR TURN INDICATORS
- STORAGE COMPARTMENT WITH USB PORT

- RED-PAINTED FRONT AND REAR SHOCK ABSORBER SPRINGS
- METALLIC FOOTREST COVERS
- WAVY PROFILE FRONT BRAKE DISCS
- PIAGGIO MIA CONNECTIVITY SYSTEM AS STANDARD EQUIPMENT
- PIAGGIO MP3 300 HPE SPORT CAN BE RIDDEN WITH A STANDARD CAR DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW

NEW BEVERLY

300 hpe - 400 hpe

NEW BEVERLY S

300 hpe - 400 hpe



- NEW DESIGN WITH MODERN AND DYNAMIC LINES
- NEW 300 HPE AND 400 HPE ENGINES WITH ABS/ASR SYSTEM
- NEW SUSPENSION SYSTEM FOR MAXIMUM STABILITY AND COMFORT
- SPACIOUS UNDERSEAT COMPARTMENT, LARGE ENOUGH TO HOLD TWO JET HELMETS
- STORAGE COMPARTMENT WITH USB PORT
- FLYSCREEN (STANDARD ON 400 HPE)

- NEW KEYLESS SYSTEM
- FULLY DIGITAL INSTRUMENT CLUSTER
- FULL LED LIGHTING SYSTEM
- ADVANCED PIAGGIO MIA CONNECTIVITY SYSTEM (STANDARD ON 400 HPE)
- SMART, SOPHISTICATED STYLE: GLOSSY COLOUR RANGE, DARK BROWN SADDLE WITH DOUBLE MATERIAL AND TONE-ON-TONE DOUBLE-STITCHING. WARM METALLIC FINISHES AND LIGHT GREY WHEEL RIMS.



- COMPLETELY REVAMPED, DYNAMIC AND MODERN DESIGN
- NEW 300 HPE AND 400 HPE ENGINES WITH ABS/ASR SYSTEM
- NEW SUSPENSION SYSTEM FOR MAXIMUM STABILITY AND COMFORT
- UNDERSEAT COMPARTMENT LARGE ENOUGH TO HOLD TWO JET HELMETS AND STORAGE COMPARTMENT WITH USB PORT
- FLYSCREEN (STANDARD ON 400 HPE)

- NEW KEYLESS SYSTEM
- FULLY DIGITAL INSTRUMENT CLUSTER
- FULL LED LIGHTING SYSTEM
- ADVANCED PIAGGIO MIA CONNECTIVITY SYSTEM (OPTIONAL ON 300 HPE)
- SPORTY STYLE WITH DOUBLE-MATERIAL AND CONTRASTING DOUBLE-STITCHED BLACK SADDLE. GRAPHITE-EFFECT FINISHES AND DARK GREY WHEEL RIMS.




MEDLEY

150 i-get - 125 i-get



- I-GET 125 AND 150 CC ENGINES WITH START&STOP SYSTEM
- DYNAMIC DESIGN
- HEADLIGHT AND FULL LED DRL
- MULTIFUNCTION LCD DIGITAL INSTRUMENT CLUSTER
- ERGONOMIC SEAT

- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT COMPARTMENT, LARGE ENOUGH TO HOLD TWO FULL-FACE HELMETS
- STORAGE COMPARTMENT WITH USB PORT
- CLASSIC, ELEGANT COLOURS MATCHED WITH MATT BRONZE FINISHES

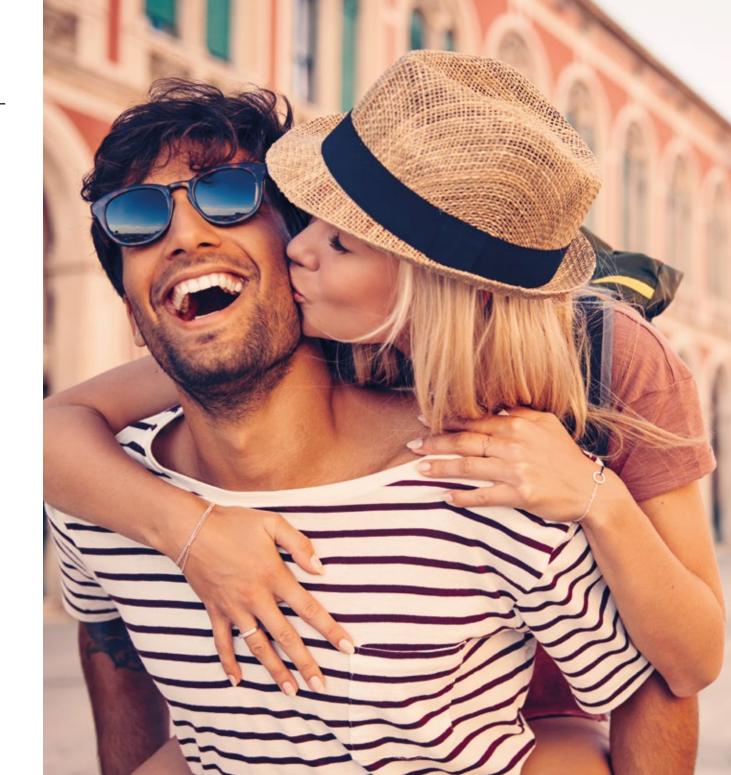



*Due to supply issues on the international semiconductor market, the Piaggio Medley S will no longer be equipped with the PMP connectivity system from 1 June 2021 and until further notice. The absence of this connectivity system will in no way affect safe use of the vehicle. Piaggio is in any case pleased to advise that as soon as the PMP connectivity system is available again, this will be communicated on the Medley S page of our website, and the appropriate dealer will contact all customers who have purchased the vehicle after 1 June 2021. They will arrange installation of the PMP connectivity system free of charge as well as offer a general check-up for the vehicle, also free of charge.

MEDLEY S

150 i-get - 125 i-get



- I-GET 125 AND 150 CC ENGINES WITH START&STOP SYSTEM
- DYNAMIC DESIGN
- HEADLIGHT AND FULL LED DRL
- MULTIFUNCTION LCD DIGITAL INSTRUMENT CLUSTER
- ERGONOMIC SEAT
- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT COMPARTMENT,

LARGE ENOUGH TO HOLD TWO FULL-FACE HELMETS

- STORAGE COMPARTMENT WITH USB PORT
- SPORTY COLOURS MATCHED WITH BLACK AND RED FINISHES
- WAVY PROFILE FRONT AND REAR BRAKE DISC AND GOLD-COLOURED CALIPERS
- PIAGGIO MIA* CONNECTIVITY SYSTEM AS STANDARD EQUIPMENT

LIBERTY/LIBERTY S

150 i-get - 125 i-get - 50 i-get





- INSTRUMENTATION WITH LCD DISPLAY
- ABS ONLY ON THE FRONT WHEEL ON 125 AND 150 CC
- AIR-COOLED I-GET ENGINES EQUIPPED, FOR ALL ENGINE CAPACITIES, WITH ELECTRONIC INJECTION AND 3 VALVES
- UNDERSEAT COMPARTMENT LARGE ENOUGH TO HOLD A JET HELMET WITH VISOR
- FRONT COMPARTMENT FOR STORAGE OF SMALL ITEMS
- LOW, EASILY ACCESSIBLE SADDLE AND FOLD-AWAY PASSENGER FOOTPEGS FOR GREATER COMFORT









- 50 CC I-GET 4-STROKE 3 VALVE ELECTRONIC INJECTION ENGINE
- COMFORTABLE SADDLE ADJUSTABLE TO THREE DIFFERENT HEIGHTS
- UNDERSEAT COMPARTMENT SPACIOUS ENOUGH FOR A FULL-FACE HELMET
- MAXIMUM RESPECT FOR THE ENVIRONMENT AND LOW CONSUMPTION



MYMOOVER

125 i-get



- ENGINE 125CC EURO 5
- THREE WHEELS FOR GREATER SAFETY
- SPACIOUS REAR TOP BOX WITH 261 LITRES AND 60 KG CARGO CAPACITY
- FRONT RACK WITH 20 KG CARRYING CAPACITY
- CENTRAL A3 BAG WITH 5 KG CARRYING CAPACITY

- VEHICLE TILTING SYSTEM FOR GREATER RIDING STABILITY
- PARKING BRAKE AND TILT LOCK FOR SAFE PARKING
- LARGE WINDSCREEN
- USB CHARGING PORT FOR ELECTRONIC DEVICES



PIAGGIO 1

- Windshield
- Rack
- Top box
- Lateral stand
- Piaggio MIA system

MP3

- 50 I top box
- 37 I top box
- Style windshield
- Comfort+ leg cover
- Racing footrest kit
- Leg cover
- Leg cover heating kit
- Heated hand grips
- Hand warmers
- Electronic alarm system
- Mechanical anti-theft saddlehandlebar lock
- Vehicle cover for outdoor use
- Piaggio Multimedia Platform
- Smartphone bracket
- Comfort+ seat
- Mirror helmet with visor and retractable sun visor (also available in version with builtin Bluetooth intercom)
- Modular helmet with visor and retractable sun visor

NEW BEVERLY

- Windshield
- Transparent or smoked flyscreen
- 36 l top box (can hold a full-face helmet or two P-Style Jet helmets) • Large top box kit (can hold two jet
- 521 top box (can hold 2 Full Jet Helmets)
- 521 top box backrest to match saddle colour
- Vehicle-coloured 521 top box cover
- Comfort+ leg cover
- Heating module for leg cover
- Heated accessory control unit
- Heated hand grips
- Heating saddle
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- PMP
- Piaggio Multimedia Platform
- Sport exhaust
- Hand guards
- Sport mat

MEDLEY

- Style and Urban windshield
- Transparent or smoked top
- helmets)
- Medium top box (can hold a full-face helmet or two P-Style Jet helmets)
- Top box bracket kit
- Top box backrest to match saddle colour
- Leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- Piaggio Multimedia Platform
- Rubber mat
- P-Style helmet

LIBERTY

- Windshield
- Transparent or smoked flyscreen
- Top box (can hold a full-face helmet or two P-Style Jet helmets)
- Top box backrest to match saddle colour
- Top box bracket kit
- Comfort+ leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- Piaggio Multimedia Platform
- USB port kit
- Side stand
- Rubber mat
- Vehicle-coloured P-Style helmet





	PIAGGIO 1	PIAGGIO 1 ACTIVE
Engine	Electric hub motor	Electric hub motor
Battery	1.4 kWh	2.3 kWh
Voltage	48 V	48 V
Capacity	29 Ah	48 Ah
Power	1.2 kW (1.34 kW peak)	2 kW (3 kW peak)
Max Speed	45 km/h	60 km/h
Torque	85 Nm	90 Nm
Cooling	Air	Air
Starter	Keyless	Keyless
Chassis	Single cradle structure of steel tubes and stamped sheet metal	Single cradle structure of steel tubes and stamped sheet metal
Front suspension	Single-sided suspension (single shock absorber)	Single-sided suspension (single shock absorber)
Front suspension	Double hydraulic shock absorber	Double hydraulic shock absorber
Front brake	Disc Ø 175 mm	Disc Ø 175 mm (Combined Braking System front and rear, CBS)
Rear brake	Disc Ø 175 mm	Disc Ø 175 mm (Combined Braking System front and rear, CBS)
Front tyre	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"
Rear tyre	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"
Seat height	770 mm	770 mm
Range ECO	55 km*	85 km*
Range WMTC	43 km	66 km
Length / Width / Wheelbase	1.680 mm / 750 mm / 1.220 mm	1.680 mm / 750 mm / 1.220 mm
Weight (without battery)	75 kg	79 kg
Battery weight	10 kg	15 kg
Emissions compliance	EURO 5	EURO 5

^{*}The measured data are based on road test at constant speed ("wide open throttle") and can be affected by different conditions such as load, temperature, wind speed, road surface and operating habits. Battery capacity may decay up to 20% due to different factors such as number of recharging cycles and battery usage.

	MP3 SPORT ADVANCED	MP3 / SPORT	MP3 / SPORT
	500 hpe	400 hpe	300 hpe
Engine	MASTER hpe single-cylinder, 4 stroke	Single cylinder 4-stroke - hpe	Single cylinder 4-stroke - hpe
Engine capacity	493 cc	399 сс	278 cc
Bore x Stroke	94 mm x 71 mm	84 mm x 72 mm	75 mm x 63 mm
Max Power	32 kW (43,5 HP) at 7.750 rpm	26 kW (35.3 HP) at 7,000 rpm	19 kW (26 HP) at 7,750 rpm
Max Torque	47,5 Nm at 5.750 rpm	37.7 Nm at 5,500 rpm	26.1 Nm at 6,250 rpm
Valve train	Single overhead cam shaft (SOHC) with 4 valves and roller tappets	Single overhead cam shaft (SOHC) with 4 valves and roller tappets	Single overhead camshaft (SOHC) - 4 valves
Fuel system	Electronic injection	Electronic injection	Electronic injection
Cooling	Liquid	Liquid	Liquid
Front suspension	Articulated quadrilateral - Stroke: 85 mm. Electro-hydraulic suspension blocking system.	Articulated quadrilateral - Stroke: 85 mm. Electro-hydraulic suspension blocking system.	Double wheel with oscillating arms
Rear suspension	Dual gas shock absorber with continuous spring preload adjustment - Stroke: 108 mm	Dual hydraulic shock absorber with pre-adjusted spring in one of 4 positions - Stroke: 102 mm	Coil springs and shock absorbers
Braking system	ASR with braking integrated with the pedal	ASR with braking integrated with the pedal	ASR + ABS with braking integrated with the pedal
Front brake	Two Ø 258 mm discs	Two Ø 258 mm discs	Two Ø 258 mm discs
Rear brake	Ø 240 mm disc	Ø 240 mm disc	Ø 240 mm disc
Front tyre	Tubeless 110/70-13" (x2)	Tubeless 110/70-13" (x2)	Tubeless 110/70 - 13" (x2)
Rear tyre	Tubeless 140/70-14"	Tubeless 140/70-14"	Tubeless 140/60 - 14"
Length / Width / Wheelbase	2,200 mm / 800 mm / 1,540 mm	2,200 mm / 800 mm / 1,560 mm	2,000 mm / 800 mm / 1,450 mm
Seat height	790 mm	790 mm	780 mm
Fuel tank capacity	13,2 litres (including 1,8 litre reserve)	13.2 litres (including 1.8 litre reserve)	11 litres (including 1.8 litre reserve)
Fuel consumption	3.7 litres per 100 kmm	3.8 litres per 100 km	3.2 litres per 100 km
CO ₂ Emissions	86 g/km	89 g/km	74 g/km
Kerb weight	282 kg	257 kg	225 kg
Emissions compliance	EURO 5	EURO 5	EURO 5

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	BEVERLY / BEVERLY S	
	400 hpe	300 hpe
Engine	Single cylinder 4-stroke, 4 valves	Single cylinder 4-stroke, 4 valves
Engine capacity	399 сс	278 сс
Bore x Stroke	84 mm x 72 mm	75 mm x 63 mm
Max Power	26 kW (35 HP) at 7,500 rpm	19 kW (25.8 HP) at 8,000 rpm
Max Torque	37.7 Nm at 5,500 rpm	26 Nm at 6,250 rpm
Consumption (WMTC cycle)	27 km/l	30.3 km/l
CO ₂ emissions	87 g/km	77 g/km
Valve train	Single overhead camshaft (SOHC) - 4 valves	Single overhead camshaft (SOHC) - 4 valves
Fuel system	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Starter	Electric	Electric
Transmission	Automatic CVT	Automatic CVT
Clutch	Oil bath automatic centrifugal multiplate clutch	Double cradle tubular pipe in high strength steel
Frame	Double cradle tubular pipe in high strength steel	Double cradle in high strength tubular steel
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Dual, double action hydraulic shock absorber, adjustable preload on 5 positions	Dual, double action hydraulic shock absorber, adjustable preload on 5 positions
Front brake	Ø 300 mm disc	Ø 300 mm disc
Rear brake	Ø 240 mm disc	Ø 240 mm disc
Braking system	ABS/ASR	ABS/ASR
Front tyre	Tubeless 120/70 - 16"	Tubeless 110/70 - 16"
Rear tyre	Tubeless 150/70 - 14"	Tubeless 140/70 - 14"
Length / Width / Wheelbase	2,155 mm / 800 mm / 1,550 mm	2,125 mm / 800 mm / 1,540 mm
Fuel tank capacity	12 litres	12 litres
Emissions compliance	EURO 5	EURO 5

	MEDLEY / MEDLEY S	
	150 i-get	125 i-get
Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity	155 cc	125 cc
Bore x Stroke	58 mm x 58.7 mm	52 mm x 58.7 mm
Max. Power	12.4 kW (16.8 HP) at 8,750 rpm	11 kW (15 HP) at 8,750 rpm
Max. Torque	15 Nm a 6,500 rpm	12 Nm a 6,500 rpm
Consumption (WMTC cycle)	41 km/l	42 km/l
CO ₂ Emissions	59 g/km	59 g/km
Valve train	Single overhead camshaft (SOHC) - 4 valves	Single overhead camshaft (SOHC) - 4 valves
Fuel System	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Starter	Start & Stop system	Start & Stop system
Transmission	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Single cradle tubular steel structure with pressed steel reinforcements	Single cradle tubular steel structure with pressed steel reinforcements
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Dual, double action hydraulic shock absorber with adjustable spring preload to 5 positions	Dual, double action hydraulic shock absorber with adjustable spring preload to 5 positions
Front brake	Ø 260 mm disc	Ø 260 mm disc
Rear brake	Ø 240 mm disc	Ø 240 mm disc
Front tyre	Tubeless 100 / 80-16"	Tubeless 100 / 80 -16"
Rear tyre	Tubeless 120 / 70 - 14"	Tubeless 120 / 70 - 14"
ABS	ABS/ASR vale anche per il 125	ABS/ASR vale anche per il 125
Length / Width / Wheelbase	2,020 mm / 705 mm / 1,395 mm	2,020 mm / 705 mm / 1,395 mm
Saddle height	799 mm	799 mm
Fuel tank capacity	71	71
Emissions compliance	EURO 5	EURO 5

	LIBERTY / LIBERTY S		
	150 i-get	125 i-get	50 i-get
Ingine	Single cylinder 4-stroke i-get	single cylinder 4-stroke i-get	single cylinder 4-stroke i-get
ngine capacity	155 cc	124 cc	49 cc
Bore x Stroke	58 mm x 58.6 mm	52 mm x 58.6 mm	39 mm x 41.4 mm
Max Power	9.3 kW (12,6 HP) a 7,500 rpm	8,1 kW (10.9 HP) a 8,250 rpm	2.2 kW (3 HP) a 7,750 rpm
Max Torque	12,8 Nm at 6,500 rpm	10,75 Nm at 6,500 rpm	2.9 Nm at 6,500 rpm
Consumption (WMTC)	36.9 Km/l	40 Km/l	40 km/l
CO ₂ Emissions	63 g/Km	60 g/Km	57 g/km
alve train	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)
Cooling	Air	Air	Air
uel system	Electronic injection	Electronic injection	Electronic injection
tarter	Electric	Electric	Electric
ransmission	Automatic CVT	Automatic CVT	Automatic CVT
lutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
ame	High resistance tubular steel	High resistance tubular steel	High resistance tubular steel
ont suspension	Telescopic hydraulic fork	Telescopic hydraulic fork	Telescopic hydraulic fork
ear suspension	Single hydraulic shock absorber with 5-position preload adjustment	Single hydraulic shock absorber with 5-position preload adjustment	Single hydraulic shock absorber
ont tyre	Tubeless 90 / 80 - 16"	Tubeless 90 / 80 - 16"	Tubeless 90 / 80 - 16"
ear tyre	Tubeless 100 / 80 - 14"	Tubeless 100 / 80 - 14"	Tubeless 100 / 80 - 14"
ont brake	Ø 240 mm disc	Ø 240 mm disc	Ø 240 mm disc
ear brake	Ø 140 mm drum	Ø 140 mm drum	Ø 140 mm drum
BS	ABS at the front wheel only	ABS at the front wheel only	-
ngth / Width Vheelbase	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,370 mm
eat height	790 mm	790 mm	780 mm
ıel tank capacity	6 litres	6 litres	6 litres
missions compliance	EURO 5	EURO 5	EURO 5

Engine 125 i-get Engine Single cylinder 4-stroke i-get 125 cc Engine capacity 49 cc 125 cc Bore per stroke 39 mm x 41.4 mm 52 mm x 58.7 mm Max Forque 21 kW (2.8 HP) at 7,250 pm 8 kW 110.9 HP) at 8,750 pm Max Torque 28 Nm at 6,100 pm 10 Nm at 5,250 pm Consumption (WMTC cycle) 37 km/l Cot, Emissions 7 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Eval system Electronic injection Liquid Starter Electronic Electronic Cooling Air Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single pradle structure in high Single cradle structure in high Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Hydraulic shock absorber Single hydraulic shock absorber Front brake 2070 - 10" 200 mm 2 x disc Front brake		ZIP / ZIP S	MYMOOVER
Engine capacity 49 cc 125 cc Bore per stroke 39 mm x 41.4 mm 52 mm x 58.7 mm Max Power 2.1 kW (2.8 HP) at 7.250 rpm 8 kW (10.9 HP) at 8.750 rpm Max Torque 2.8 Nm at 6,100 rpm 10 Nm at 5,250 rpm Consumption (WMTC cycle) 41.6 km/l (WMTC cycle) 37 km/l CO2 Emissions 57 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electronic injection Electroic injection Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10° 0 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16° Rear tyre 120/70 - 10° 2 x 90/90 - 12° Front brake Ø 110 mm drum 2 x 90/90 - 12° <t< td=""><td></td><td>50 i-get</td><td>125 i-get</td></t<>		50 i-get	125 i-get
Bore per stroke 39 mm x 41.4 mm 52 mm x 58.7 mm Max Power 2.1 kW (2.8 HP) at 7,250 pm 8 kW (10.9 HP) at 8,750 pm Max Torque 2.8 Nm at 6,100 pm 10 Nm at 5,250 pm Consumption 41.6 km/l (WMTC cycle) 37 km/l CO2 Emissions 57 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electroic injection Electroic Cooling Air Liquid Starter Electric Electric Tansmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Frant suspension Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Disco 0 240 mm Rear tyre 120/70 - 10" 9 200 mm 2 x disc Front brake 0 175 mm disc 90/80 - 18" Rear brake 0 110 mm drum 2 x 90	Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Max Power 2.1 kW (2.8 HP) at 7,250 rpm 8 kW (10.9 HP) at 8,750 rpm Max Torque 2.8 Nm at 6,100 rpm 10 Nm at 5,250 rpm Consumption (WMTC cycle) 41.6 km/l (WMTC cycle) 37 km/l CO2 Emissions 57 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electronic injection Electronic injection Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single crade structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Rear suspension Hydraulic telescopic fork Hydraulic shock absorber Front tyre 100/80 - 10° Disco Ø 240 mm Rear tyre 120/70 - 10° Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16° Rear brake Ø 110 mm drum 2 x 90/90 - 12° Length / Width / Wheelbase Adjustable: 750 mm - 760 mm -	Engine capacity	49 cc	125 cc
Max Torque 2.8 Nm at 6,100 rpm 10 Nm at 5,250 rpm Consumption 41.6 km/l (WMTC cycle) 37 km/l CO2 Emissions 57 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electronic injection Electronic injection Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Longth / Width / Wheelbase Adjustable: 750 mm - 765 mm - 780 mm 750 mm - 785 mm - 780 mm Fuel tank capacity 6 6 litres 10 litres	Bore per stroke	39 mm x 41.4 mm	52 mm x 58.7 mm
Consumption (WMTC cycle) 41.6 km/l (WMTC cycle) 37 km/l CO2 Emissions 57 g/km 67 g/km Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electronic injection Electronic injection Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase Adjustable: 750 mm - 785 mm - 780 mm - 780 mm - 785 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Max Power	2.1 kW (2.8 HP) at 7,250 rpm	8 kW (10.9 HP) at 8,750 rpm
### Automatic Cycle ### Autom	Max Torque	2.8 Nm at 6,100 rpm	10 Nm at 5,250 rpm
Distribution Single overhead camshaft, 3 valves Single overhead camshaft, 4 valves Fuel system Electronic injection Electronic injection Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres		41.6 km/l (WMTC cycle)	37 km/l
Fuel system Electronic injection Electronic injection Liquid	CO ₂ Emissions	57 g/km	67 g/km
Cooling Air Liquid Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic certrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase Adjustable: 750 mm - 765 mm - 780 mm 760 mm Seat Height Adjustable: 750 mm - 785 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Distribution	Single overhead camshaft, 3 valves	Single overhead camshaft, 4 valves
Starter Electric Electric Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Width / Width / Wheelbase 700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Fuel system	Electronic injection	Electronic injection
Transmission Automatic CVT Automatic CVT Clutch Automatic centrifugal dry clutch Automatic centrifugal dry clutch Frame Single cradle structure in high resistance tubular steel Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Cooling	Air	Liquid
ClutchAutomatic centrifugal dry clutchAutomatic centrifugal dry clutchFrameSingle cradle structure in high resistance tubular steelSingle cradle structure in high resistance tubular steelFront suspensionHydraulic telescopic forkHydraulic telescopic forkRear suspensionSingle hydraulic shock absorberSingle hydraulic shock absorberFront tyre100/80 - 10"Disco Ø 240 mmRear tyre120/70 - 10"Ø 200 mm 2 x discFront brakeØ 175 mm disc90/80 - 16"Rear brakeØ 110 mm drum2 x 90/90 - 12"Length / Width / Wheelbase1,700 mm / 670 mm / 1,230 mm2,155 mm / 795 mm / 1,380 mmSeat HeightAdjustable: 750 mm - 765 mm - 780 mm760 mmFuel tank capacity6.6 litres10 litres	Starter	Electric	Electric
Frame Single cradle structure in high resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic shock absorber Single hydraulic shock absorber Single hydraulic shock absorber Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm Fuel tank capacity 6.6 litres 10 litres	Transmission	Automatic CVT	Automatic CVT
resistance tubular steel Front suspension Hydraulic telescopic fork Hydraulic telescopic fork Rear suspension Single hydraulic shock absorber Single hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm Seat Height Adjustable: 750 mm - 785 mm - 780 mm Fuel tank capacity 6.6 litres 10 litres	Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Rear suspension Single hydraulic shock absorber Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Frame	Single cradle structure in high resistance tubular steel	Single cradle structure in high resistance tubular steel
Front tyre 100/80 - 10" Disco Ø 240 mm Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear tyre 120/70 - 10" Ø 200 mm 2 x disc Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Rear suspension	Single hydraulic shock absorber	Single hydraulic shock absorber
Front brake Ø 175 mm disc 90/80 - 16" Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Front tyre	100/80 - 10"	Disco Ø 240 mm
Rear brake Ø 110 mm drum 2 x 90/90 - 12" Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Rear tyre	120/70 - 10"	Ø 200 mm 2 x disc
Length / Width / Wheelbase 1,700 mm / 670 mm / 1,230 mm 2,155 mm / 795 mm / 1,380 mm Seat Height Adjustable: 750 mm - 765 mm - 780 mm 760 mm Fuel tank capacity 6.6 litres 10 litres	Front brake	Ø 175 mm disc	90/80 - 16"
Wheelbase Seat Height Adjustable: 750 mm - 765 mm - 780 mm Fuel tank capacity 6.6 litres 10 litres	Rear brake	Ø 110 mm drum	2 x 90/90 - 12"
Fuel tank capacity 6.6 litres 10 litres	Length / Width / Wheelbase	1,700 mm / 670 mm / 1,230 mm	2,155 mm / 795 mm / 1,380 mm
	Seat Height	Adjustable: 750 mm - 765 mm - 780 mm	760 mm
Emissions compliance EURO 5 EURO 5	Fuel tank capacity	6.6 litres	10 litres
	Emissions compliance	EURO 5	EURO 5

DEDICATED SERVICES



Thanks to the X-Care+ Maintenance services the brand offers, you can drive your scooter without a care in the world. When you select and purchase one of the packages available to meet various needs, you will be entitled to periodic scheduled maintenance in line with the specifications set out in the use and maintenance manual. In the X-Care+ Maintenance packages, the intermediate checks are also included to guarantee perpetual top performance.

2 YEARS 2 service operations (1,000 - 10,000 km)

3 YEARS 3 service operations (1,000 - 10,000 - 20,000 km)

4 YEARS 4 service operations (1,000 - 10,000 - 20,000 - 30,000 km)



The dream of riding a Piaggio is now even easier to achieve, thanks to Piaggio Financial Services, the new Piaggio Group platform dedicated to the most innovative financing solutions.

www.piaggiofinancialservices.com

The company reserves the right to make technical and aesthetic changes at any time. Ride carefully, always wearing a helmet and and proper attire. Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with prevailing standards. See your Official Piaggio Dealership and Authorised Retailers for a secure purchase and guaranteed service support. Original Piaggio spare parts are a quarantee of quality and ensure that vehicle performance remains unaltered.



The X-Care+ Extended Warranty completes the dedicated services on offer, protecting your peace of mind when it comes to your scooter and allowing you to travel worry-free with a 1 or 2 year warranty which includes roadside assistance:

- Coverage of repair costs for faults due to manufacturing or assembly defects on parts
- Replacement of any damaged parts with original spare parts, labour included
- Roadside assistance which guarantees non-stop mobility in addition to the breakdown recovery and towing services
- Specialised, certified Piaggio Group Service assistance
- Maintenance of the retail value of your used vehicle in case you decide to sell
- Coverage throughout Europe

Ask your dealership or your authorised service centre for full details of the services and coverage available in your country.

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV =ISO 9001= COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV
= ISO 14001=

COMPANY WITH SAFETY SYSTEM CERTIFIED BY DNV = OHSAS 18001=

Piaggio is a registered trademark of Piaggio & C. S.p.A.

